


Issue 60

Assemble the Engine Nozzle ④




We will continue assembling the engine nozzle in this issue. Once the F-2 is completed, you will have the option to choose between open and closed engine nozzles for installation.

60-2 Iris Panel 2×12

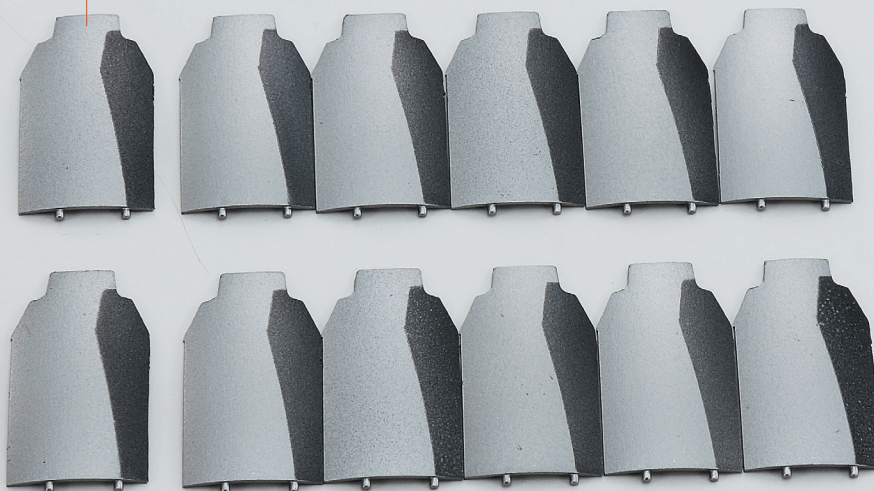

60-1 Iris Panel 1×12

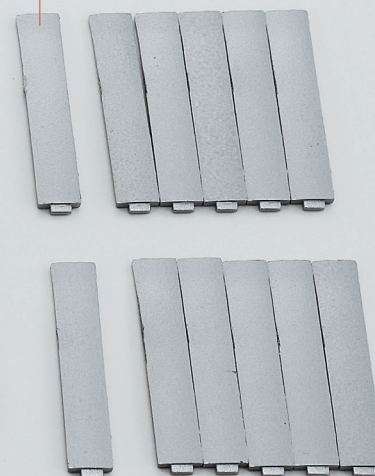

Tools Needed

The following tools and materials are required to assemble this issue. Prepare them before starting work.



ABS Cement

For joining ABS plastic parts.

Check!

Be sure to check the assembly video for detailed demonstrations.



Explanation of Symbols



Indicates where to attach included screws.



Indicates when to use adhesive. The correct adhesive will be indicated for each instance.




Cautions and Prohibitions.



Key points for using tools and techniques.




1 Assemble the Engine Nozzle

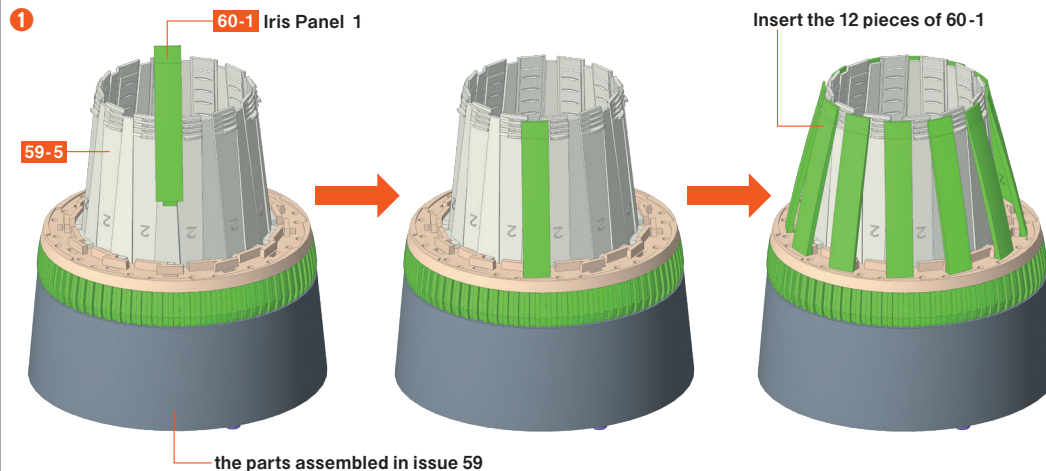

If loose when inserting, apply a small amount of ABS Cement to the protrusion on the base of **60-1** before inserting again.

Insert the parts so that the tip of **59-5** lightly touches the tip of **60-1**. You can start inserting them from any point in the circle.

Insert the **60-1 Iris Panel 1** into the engine nozzle assembled in Issue 59 as shown. Insert all 12 pieces of **60-1** as shown.

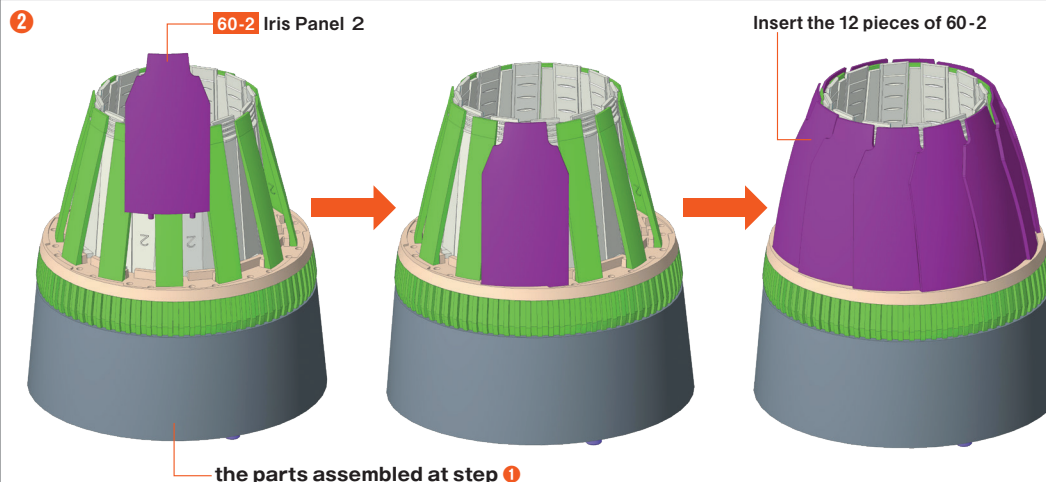

If loose when inserting, apply a small amount of ABS Cement to the protrusion on the base of **60-2** before inserting again.

Insert the parts so that the tip of **60-2** lightly touches the tip of the previously installed **60-1**. You can start inserting them from any point in the circle.

Insert the **60-2 Iris Panel 2** into the engine nozzle assembled at step 1. Insert all 12 pieces of **60-2** as shown.

Complete!

The assembly for this issue is now complete. The closed-type engine nozzle has been completed.

