

Assemble the Pylon ②

In this issue we will assemble the Triple Ejector Rack for mounting bombs and the ASM-2 (Type 93 air-to-ship guided missile).

77-7 Triple Ejector Rack Part 5×8



Tools Needed

The following tools and materials are required to assemble this issue. Prepare them before starting work.

Explanation of Symbols



Indicates where to attach included screws.



Indicates when to use adhesive. The correct adhesive will be indicated for each instance.



Cautions and Prohibitions.



Key points for using tools and techniques.

☐ Universal Adhesive
For joining metal parts.

☐ Modeling Nippers
For removing parts from the model sprues.


Check!

Be sure to check the assembly video for detailed demonstrations.








1 Assemble the Triple Ejector Rack

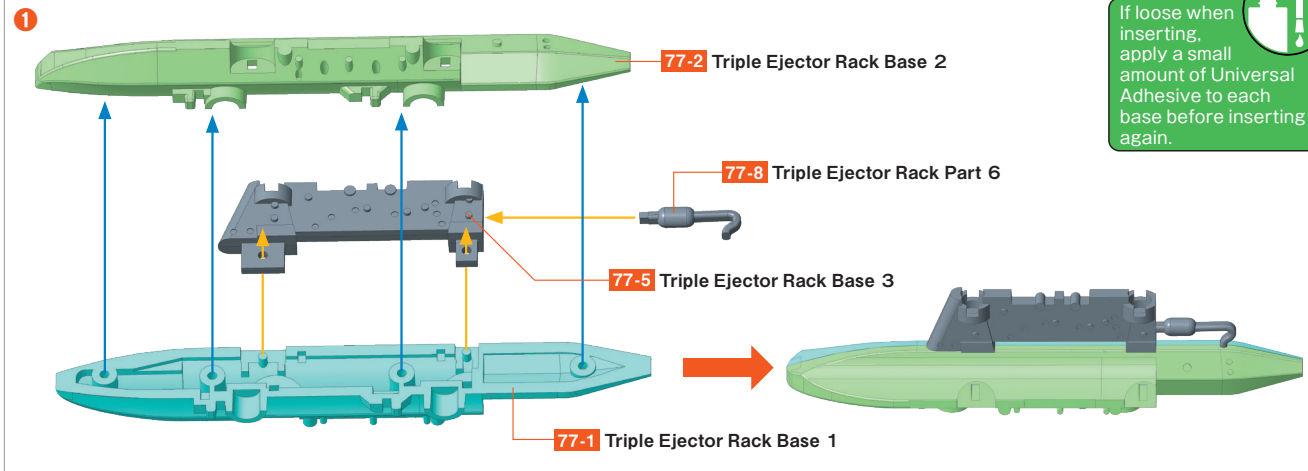


Assemble the **77-5 Triple Ejector Rack Base 3**, with the **77-8 Triple Ejector Rack Part 6** inserted, by sandwiching it between **77-1 Triple Ejector Rack Base 1** and **77-2 Triple Ejector Rack Base 2** as shown. Create four identical parts.

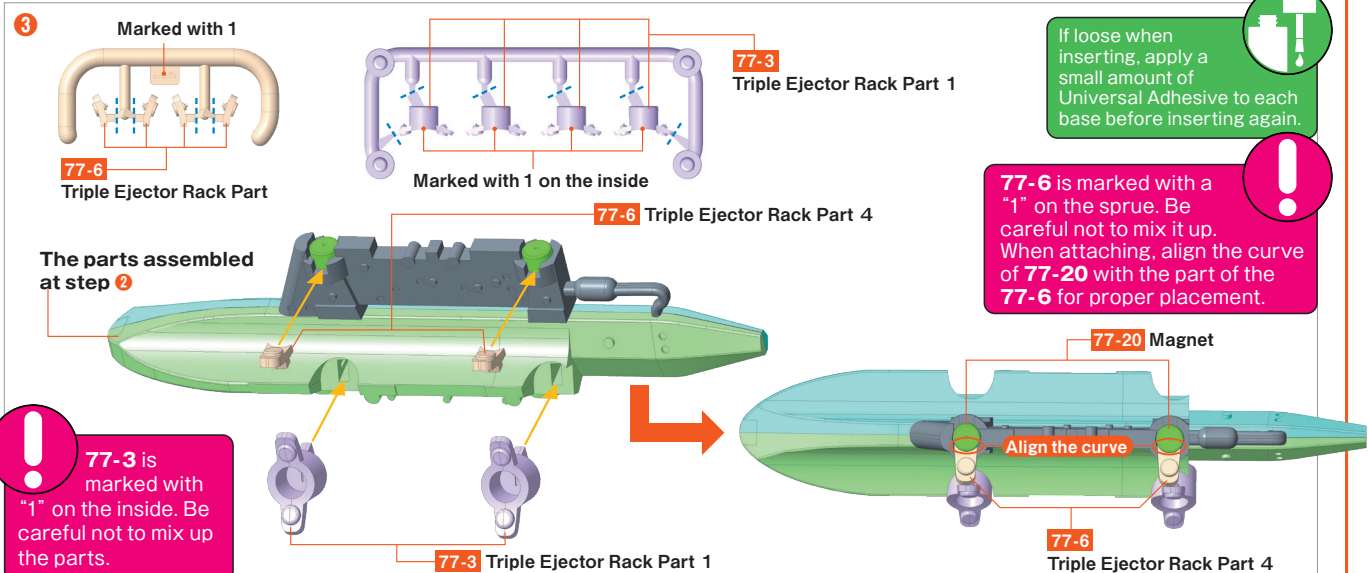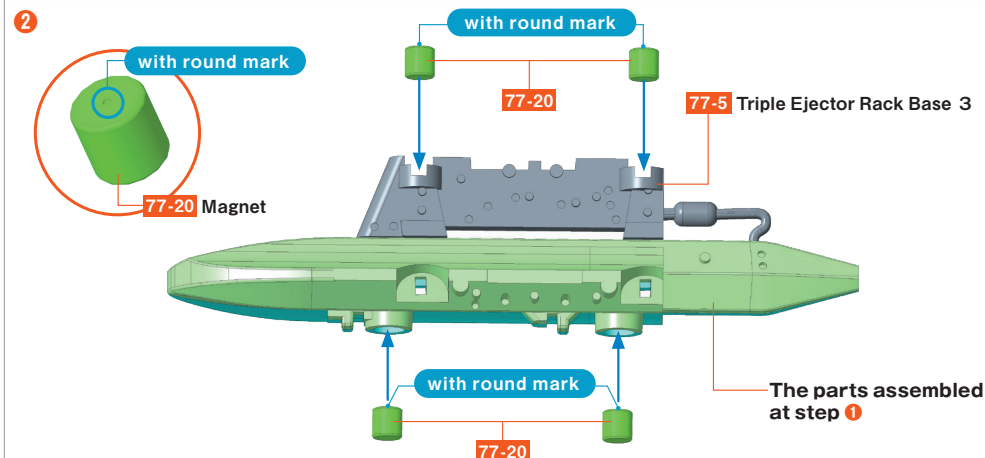


Cut out two **77-6 Triple Ejector Rack Part 4** and two **77-3 Triple Ejector Rack Part 1** from the sprues, and insert them into the Triple Ejector Rack assembled in step 2 as shown. Create four identical pieces.

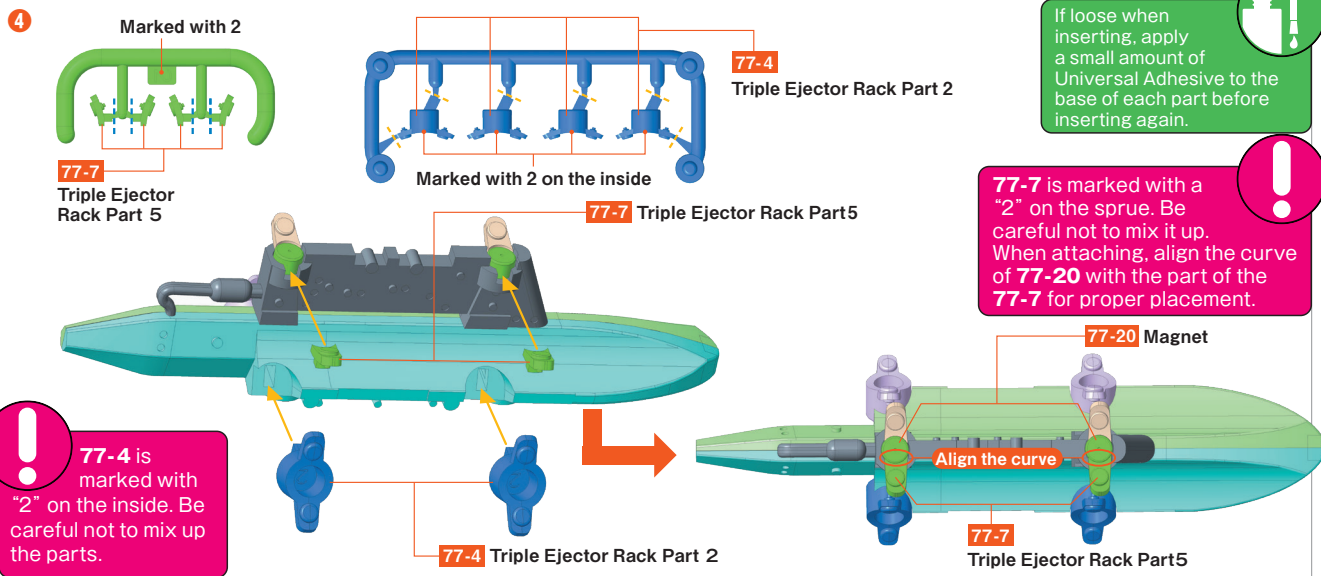

Cut out two **77-7 Triple Ejector Rack Part 5** and two **77-4 Triple Ejector Rack Part 2** from the sprues, and insert them into the Triple Ejector Rack assembled in step **3** as shown. Create four identical pieces.

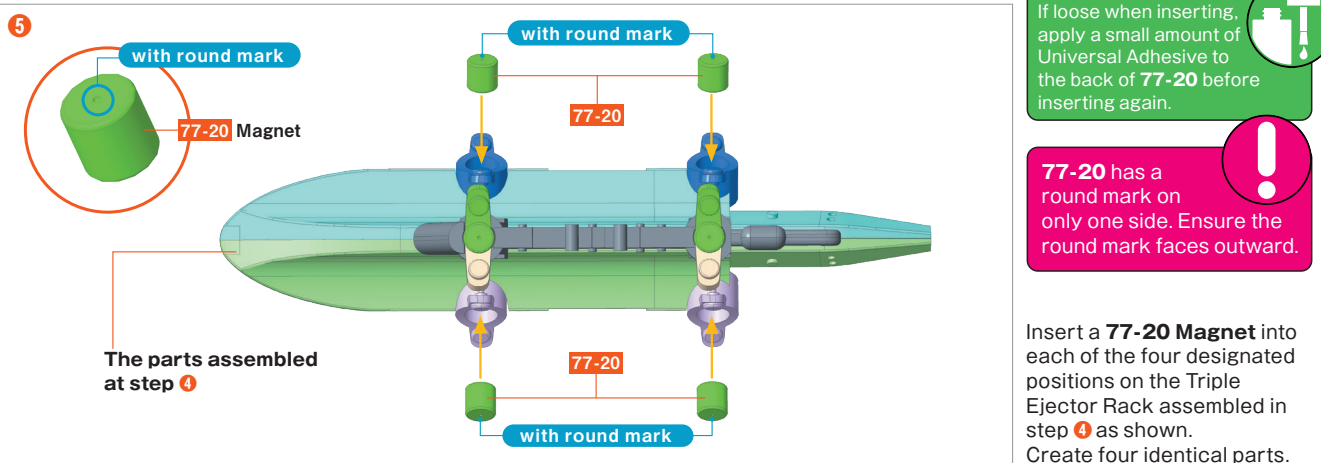

2 Assemble the ASM-2

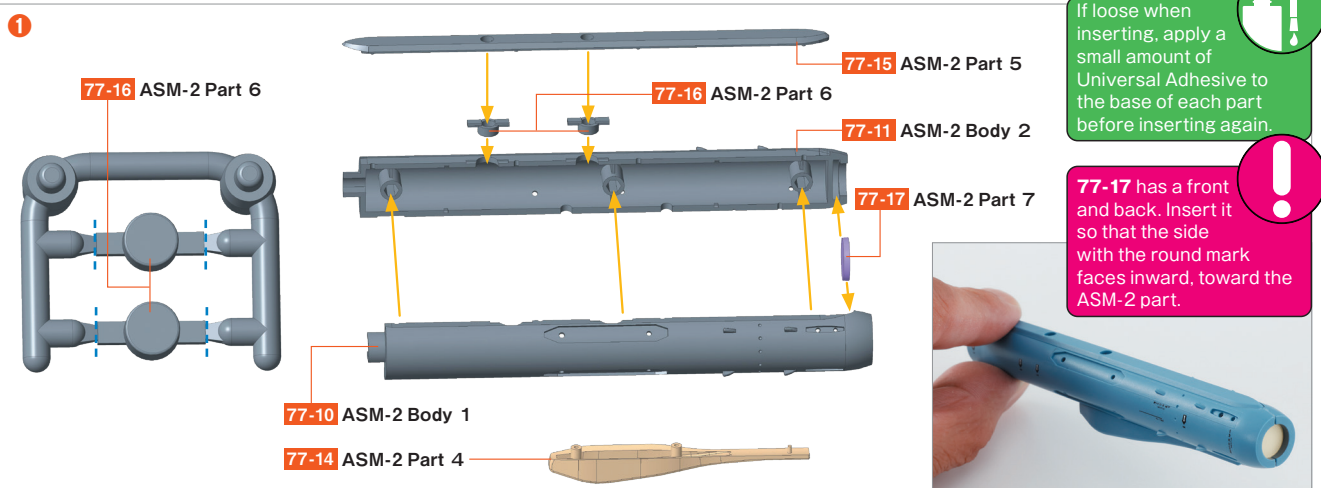

Insert **77-17 ASM-2 Part 7** into the designated position between **77-10 ASM-2 Body 1** and **77-11 ASM-2 Body 2** as shown. Also insert two **77-16 ASM-2 Parts 6**, **77-14 ASM-2 Part 4** and **77-15 ASM-2 Part 5** cut from the sprues as shown.



2

77-13 ASM-2 Part 3

77-9 ASM-2 Seeker

77-12 ASM-2 Part 2

If loose when inserting, apply a small amount of Universal Adhesive to the base of each part before inserting again.



3

with round mark

77-20 Magnet

If loose when inserting, apply a small amount of Universal Adhesive to the base of each part before inserting again.



77-20 has a round mark on one side only. Ensure that the round mark faces inward when inserting.



The parts assembled at step 2

The parts assembled at step 1

Combine **77-12 ASM-2 Part 2** and **77-13 ASM-2 Part 3**, then attach **77-9 ASM-2 Seeker** to the tip.

Attach the tip section assembled in step 2 and two **77-20 Magnets** to the **ASM-2 body** assembled in step 1.

4

77-18 ASM-2 Aileron x 4

77-19 ASM-2 Tail Fin x 4

If loose when inserting, apply a small amount of Universal Adhesive to the base of each part before inserting again.



The parts assembled at step 3

Attach four **77-18 ASM-2 Ailerons** and four **77-19 ASM-2 Tail Fins** to the **ASM-2 body** assembled in step 3 as shown.

Complete!

The assembly for this issue is now complete.

