


Issue 30

In this issue, you will assemble the left rear wheel.

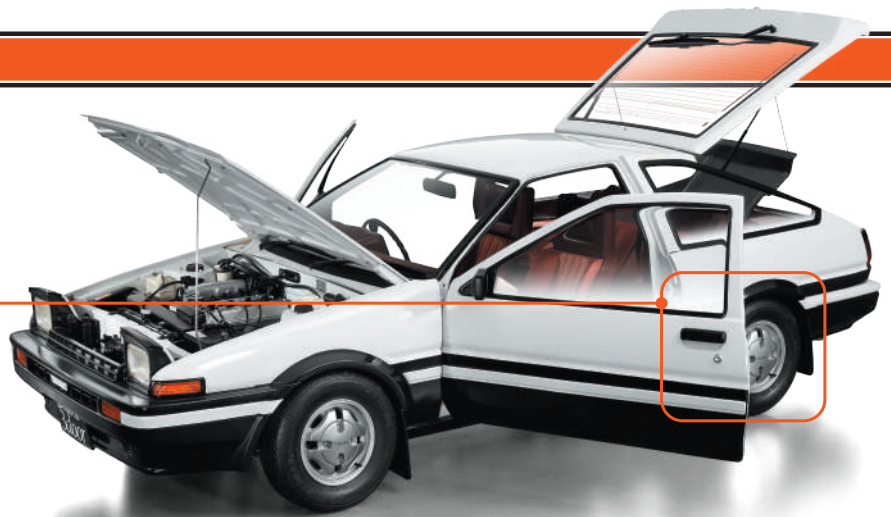

Assemble the left rear wheel

※In this guide "Left" or "(L)", and "Right" or "(R)", refer to the direction as viewed from the driver's seat.



30-A Tyre

30-B Outer Rim

30-C Inner Rim

30-D Washer

30-E Rim Cap

AM Screw (1.7×4mm) ×4+Spare

View the follow-along video



※Due to the model's design, the shapes of some parts may differ from those of the real vehicle.

step 1 Fit the wheel rim to the Tyre

You may also refer to Step 1 in Issue 3



Fit the **30-B Outer Rim** into the **30-A Tyre**.

2



30-B Outer Rim fitted into the **30-A** Tyre.

By temporarily fitting the protrusions of the **30-E Rim Cap** into the holes in the **30-B Outer Rim**, you can check the orientation of the "TOYOTA" logo on **30-E**. You may adjust the position of the logo on the **30-A Tyre** to your preference to match this angle. If the temporarily fitted **30-E** is difficult to remove, gently push it from the reverse side using a toothpick or similar tool.



3



While holding the **30-B Outer Rim** in place to prevent it from coming loose, turn it over and fit the recesses on the reverse side of the **30-C Inner Rim** onto the protrusions on the screw holes of **30-B**.

Ensure that the screw holes on **30-C** and **30-B** are aligned accurately.



While holding both rims in place to prevent them from shifting, secure the four points with **AM screws**.

Step complete



Tightening Wheel Screws in a Criss-cross Pattern

In Step 4, the wheel rim is secured with four screws. Rather than fully tightening each screw one at a time, it is best to first tighten one screw lightly ①, then lightly tighten the screw diagonally opposite ②, followed by the adjacent screw ③, and finally the remaining diagonal screw ④. After checking the overall alignment, fully tighten the screws in the same criss-cross pattern. This is the same method used when changing tyres on a real vehicle.



Complete

The assembly for Issue 30 is complete. The 30-D Washer and 30-E Rim Cap will be used in a later issue, so please keep them in a safe place to avoid losing them. In Issue 31, you will assemble the rear disc brake system.

